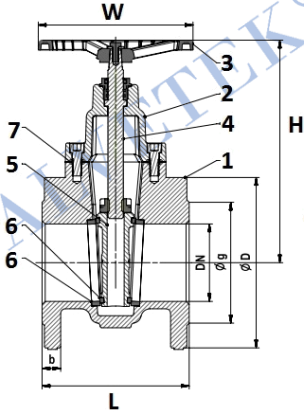


Uygulama:

Sıcak ve soğuk su sistemleri, asit ve alkali özelliği bulunmayan sıvı akışkanlar için sürgülü valf
Çalışma Basıncı: **maksimum 10 bar**
Çalışma Sıcaklığı: -10 / +120 °C

Dizayn:

Flanşlar Arası Mesafe: EN 558 Seri 14 (DIN 3202 F4)
Flanş Ölçüleri: EN 1092-2/B (DIN 2501)

Diğer Seçenekler:

İndikatör, Pnömatik Aktüatör, Hidrolik Aktüatör
Flanşlar PN6/PN10/PN16/PN25/PN40'a göre delinebilir.

Application:

Gate valve for hot and cold water, non-acidic and non-flammable liquid fluids
Working pressure: **maximum 10 bars**
Working temperature: -10 / +120°C

Design:

Face to Face: EN 558 Series 14 (DIN 3202 F4)
Flange Dimensions: EN 1092-2/B (DIN 2501)

Variants:

Indicator, Pneumatic Actuator, Hydraulic Actuator
Flanges can be drilled acc. to PN6/PN10/PN16/PN25/PN40

BASINÇ VE SICAKLIK SAHALARI / PRESSURE AND TEMPERATURE RANGE

SIZE	Permissible Working Pressure	Hydraulic Test Pressure	
	Working Temperature	for Leak-Tightness of	
	up to 120°C	Casing	Closure
DN 40 - DN 150	10 bar	15 bar	11 bar
DN 200 - DN 300	6 bar	9 bar	6,6 bar
DN 350 - DN 400	4 bar	6 bar	4,4 bar

PARÇA LİSTESİ / PART LIST

No	Parça Açıklaması Part Desc.	Materyal Material	No	Parça Açıklaması Part Desc.	Materyal Material
1	Gövde / Body	GGG 40	5	Sürgü / Wedge	GGG 40
2	Kapak / Bonnet	GGG 40	6	Baskılar / Seats	Bronze or St. Steel
3	Volan / Handwheel	GG 25	7	Conta / Gasket	NBR/EPDM
4	Mil / Stem	St. Steel			

ÖLÇÜLER / DIMENSIONS

DN	40	50	65	80	100	125	150	200	250	300	350	400
L	140	150	170	180	190	200	210	230	250	270	290	310
H	170	180	230	245	265	355	400	490	615	700	835	910
W	160	160	160	160	200	250	250	315	315	315	400	400
ØD	150	165	185	200	220	250	285	340	405	460	520	580
Øk	110	125	145	160	180	210	240	295	355	410	470	525
KG	9	10	15	17	23	37	45	80	123	166	225	368