


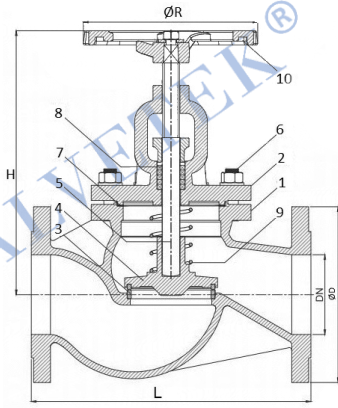

### Uygulama:

Her türlü buhar, gazlar ve sıvılar için glob valf  
Çalışma Basıncı: **maksimum 40 bar**  
Çalışma Sıcaklığı: -10 / +300 °C

### Dizayn:

Flanşlar Arası Mesafe: EN 558 Seri 1 (DIN 3202 F1)  
Flanş Ölçüleri: DIN 2501

### Diğer Seçenekler:

Ayar Diskli, Tahliye Tapalı, SDNR, İndikatör  
Flanşlar PN6/PN10/PN16/PN25/PN40'a göre delinebilir.



### Application:

Globe valve for vapours, gases and liquids  
Working pressure: **maximum 40 bars**  
Working temperature: -10 / +300°C

### Design:

Face to Face: EN 558 Series 1 (DIN 3202 F1)  
Flange Dimensions: DIN 2501

### Variants:

Regulating Disc, Drain Plug, SDNR, Indicator  
Flanges can be drilled acc. to PN6/PN10/PN16/PN25/PN40

### BASINÇ VE SICAKLIK SAHALARI / PRESSURE AND TEMPERATURE RANGE

| SIZE            | Permissible Working Pressure<br>Working Temperature |               | Hydraulic Test Pressure<br>for Leak-Tightness of |          |
|-----------------|-----------------------------------------------------|---------------|--------------------------------------------------|----------|
|                 | Pressure Rating                                     | 120°C - 180°C | Casing                                           | Closure  |
| DN 15 – DN 150  | PN 40                                               | 40 bar        | 60 bar                                           | 44 bar   |
| DN 150 – DN 200 | PN 16                                               | 16 bar        | 24 bar                                           | 17.6 bar |
| DN 250 – DN 300 | PN 10                                               | 10 bar        | 15 bar                                           | 11 bar   |
| DN 350          | PN 6                                                | 6 bar         | 9 bar                                            | 6.6 bar  |
| DN 400 - DN 600 | PN 4                                                | 4 bar         | 6 bar                                            | 4.4 bar  |

### PARÇA LİSTESİ / PART LIST

| No | Parça Açıklaması<br>Part Desc. | Materyal<br>Material | No | Parça Açıklaması<br>Part Desc.      | Materyal<br>Material |
|----|--------------------------------|----------------------|----|-------------------------------------|----------------------|
| 1  | Gövde / Body                   | GSC 25               | 6  | Civatalar&Somunlar / Bolts&Nuts     | St.Steel             |
| 2  | Kapak / Bonnet                 | GSC 25               | 7  | Kapak Sızdırmazlığı / Bonnet Gasket | Graphite             |
| 3  | Sit / Seats                    | Bronze/St. Steel     | 8  | Salmastra / Gland Packing           | Graphite             |
| 4  | Klape (≤65) / Disc (≤65)       | Bronze/St. Steel     | 9  | Yay / Spring                        | St.Steel             |
| 4  | Klape (≥80) / Disc (≥80)       | GSC 25               | 10 | Volan / Handwheel                   | GG 25                |
| 5  | Mil / Stem                     | Bronze/St. Steel     |    |                                     |                      |

### ÖLÇÜLER / DIMENSIONS

| DN | 15  | 20  | 25  | 32  | 40  | 50  | 65  | 80  | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400  | 450  | 500  | 600  |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|
| L  | 130 | 150 | 160 | 180 | 200 | 230 | 290 | 310 | 350 | 400 | 480 | 600 | 730 | 850 | 980 | 1100 | 1200 | 1250 | 1450 |
| H  | 165 | 165 | 175 | 180 | 220 | 230 | 245 | 295 | 330 | 365 | 420 | 505 | 625 | 690 | 755 | 840  | 920  | 980  | 1200 |
| ØR | 120 | 120 | 140 | 140 | 160 | 160 | 180 | 200 | 225 | 250 | 300 | 400 | 520 | 520 | 640 | 640  | 640  | 640  | 640  |
| ØD | 95  | 105 | 115 | 140 | 150 | 165 | 185 | 200 | 235 | 270 | 300 | 340 | 395 | 445 | 505 | 565  | 615  | 670  | 780  |
| KG | 4   | 4,5 | 5   | 7   | 11  | 13  | 19  | 25  | 37  | 61  | 84  | 145 | 230 | 330 | 440 | 605  | 750  | 900  | 1130 |